


## STANDARD CONNECTION PROFILE

## NOTE:

- 1. ALL MATERIAL SHALL BE ASTM D3034 SDR26 W/ GASKETS
- 2. ALL SERVICE CONNECTIONS & EXTENSIONS ARE TO BE INSTALLED WITH THE MAIN LINE CONSTRUCTION.
- 3. A CLEAN OUT IS REQUIRED AND WILL BE INSTALLED BY THE CONTRACTOR AT THE ROW FOR EACH SERVICE. CLEANOUT SHALL INCLUDE A BRASS PLUG.
- 4. CLEANOUTS SHALL BE EXTENDED 4 FEET ABOVE NATURAL GROUND. CLEANOUT CAP FITTING SHALL BE PLACED ON TOP.



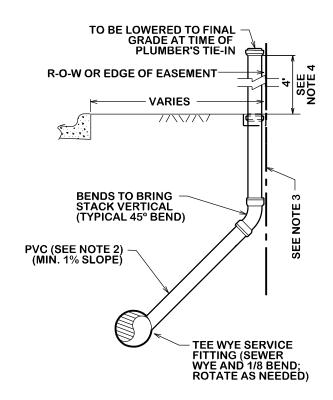

BOTTOM LIP OF CONNECTING PIPE SHALL NOT DIP BELOW CENTERLINE OF MAIN.

**DEEP CONNECTION PROFILE** 



## CITY OF BRYAN SANITARY SEWER SERVICE CONNECTION

DATE

OCT. 2012

B/CS UNIFIED STANDARD DETAIL

DETAIL NO.

S6-01



R-0-W

2'

4'

- PROPERTY LINE