


STRUCTURAL BACKFILL AREA INCLUDES ALL PAVED AREAS (SIDEWALKS, STREETS, ALLEYS, DRIVEWAYS, AND PARKING AREAS) AND SHALL EXTEND 5' BEYOND THE CURB LINE. STRUCTURAL BACKFILL SHALL BE CEMENT STABILIZED (SEE DETAIL W4-02 - AREAS TO BE PAVED) OR EXCAVATED SOIL COMPACTED TO 98% MAXIMUM DRY DENSITY AS PER ASTM D698 WITHIN OPTIMUM TO +4% WET OF OPTIMUM (SEE DETAIL W4-02 - NON-STRUCTURAL AREAS)

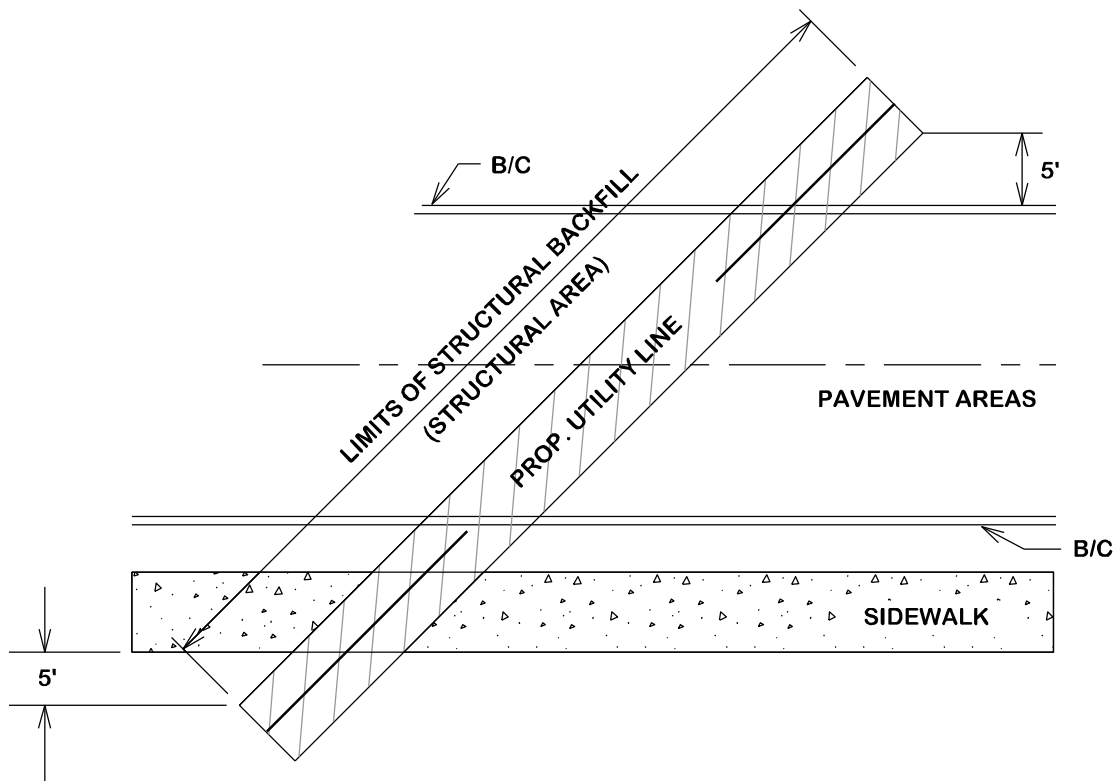

CITY OF BRYAN  
The Good Life, Texas Style

## STRUCTURAL BACKFILL AREA FOR WATER MAIN

DATE

**AUG. 2012**

**B/C'S UNIFIED  
STANDARD DETAIL**

DETAIL NO.

**W2-02**



CITY OF COLLEGE STATION