



NOTE: CASING SPACERS  
 4-RUNNER MIN. (THRU 24' DIA  
 CASING) OR 6-RUNNER MIN.  
 (24"-42" DIA. CASING) STAINLESS  
 STL. TYPE304; 8" WIDE BAND  
 W/ POLYMER RUNNERS; CENTERED  
 OR NON-CENTERED; CLEAR BELL,  
 RESTRAINED FROM FLOTATION;  
 INSULATED; "APS, INC., MOD SS18"  
 OR "CASCADE"

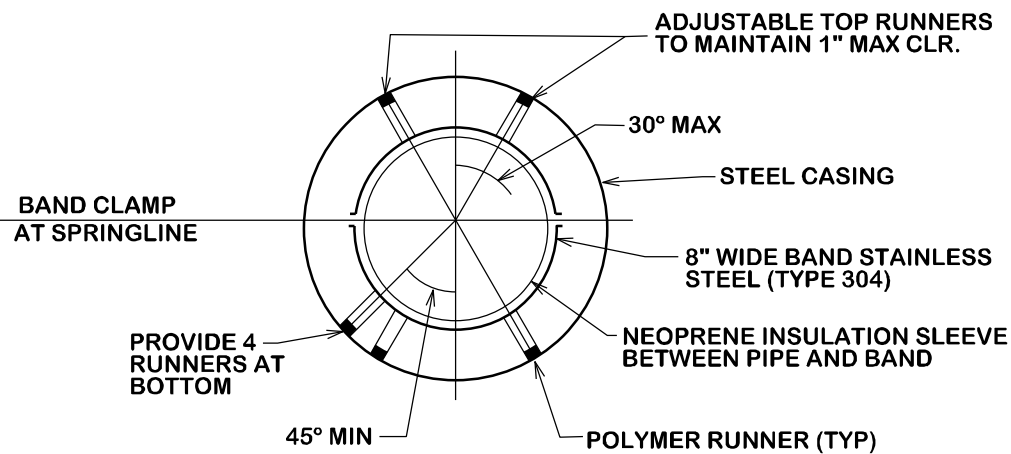

## CASING DETAIL

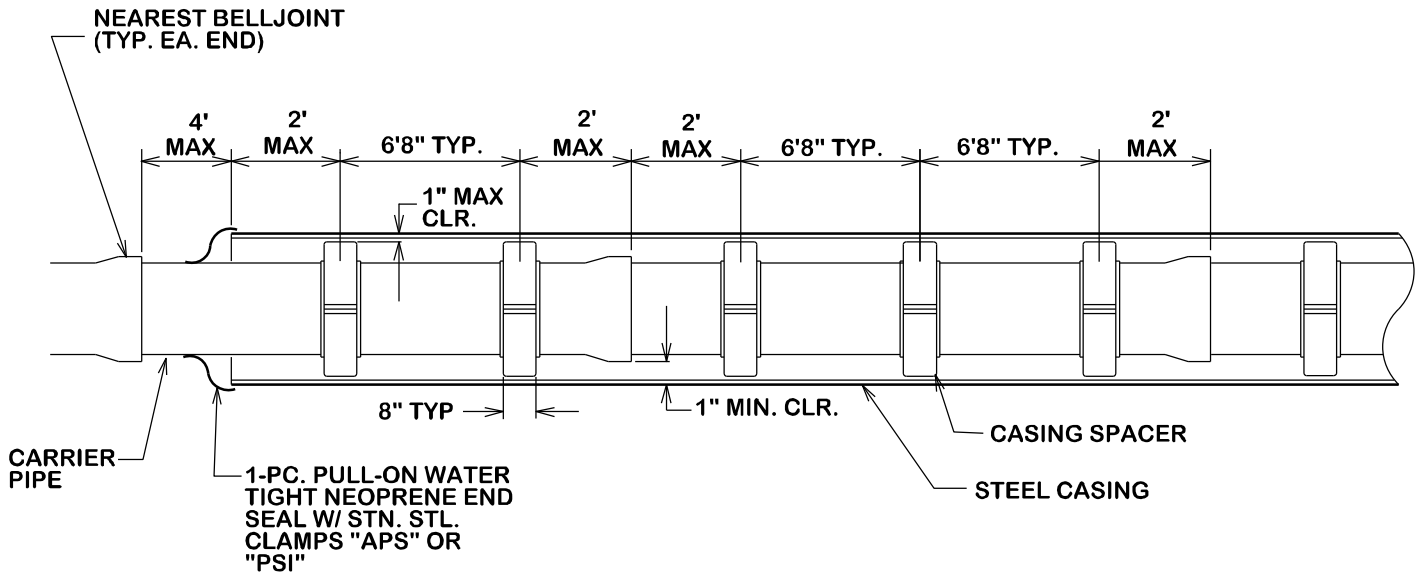

DATE

**AUG. 2012**

**B/CS UNIFIED  
 STANDARD DETAIL**

DETAIL NO.

**S5-03**

